



Gas valves




Appliance Valve	Cooker		Cook top		Orifice
	No	Yes	No	Yes	
Safety	165	165I	299	499I	
	265		499		
	565		599		
Non safety	684L	684LI	289	389I	
	684R	684RI	389		
	884	884I	589		

All valves are customized according to client specification.
 They can be supplied with a female, male, male-orifice outlet.

Knob connector	Diameter	From/to	6 mm	8 mm	(and according to customer spec)		
	Lenght		xx	yy			
	Flat features		According to customer spec				
Gas Inlet	Round		8 mm	10 mm	12 mm	16 mm	21 mm
	Fixation/Distance		According to customer spec				
Gas Outlet	Type	Male	M12 100	M12 125	M13 100	M14 150	G1/4
		Female	M10 100	M12 100	M12 125	M13 100	G1/4
Opening	Progressivity	Yes	210°	280°			
		No	90°	160°			
Safety system	Connexion		Pin	Faston	M8x1		
Capacity/Power	LPG		210 l/h	15000 BTU		12 kw	
	NG					7 kw	
Ignition Switch			Adaptable on any configuration, all valves are ready to receive it				
Certified			EC	AGA	CSA	Ukrain	Chile
			And others on special demand				



Knob connector	Diameter	From/to	6 mm	8 mm	(and according to customer spec)		
	Lenght		xx	yy			
	Flat features		According to customer spec				
Gas Inlet	Round		8 mm	10 mm	12 mm	16 mm	21 mm
	Fixation/Distance		According to customer spec				
Gas Outlet	Type	Male					
		Female	Clip				
Opening	Progressivity	Yes	210°	280°			
		No	90°	160°			
Safety system	Connexion		Pin	Faston	M8x1		
Capacity/Power	LPG		210 l/h	15000 BTU		12 kw	
	NG					7 kw	
Ignition Switch			Adaptable on any configuration, all valves are ready to receive it				
Certified			EC	AGA	CSA	Ukrain	Chile
			And others on special demand				

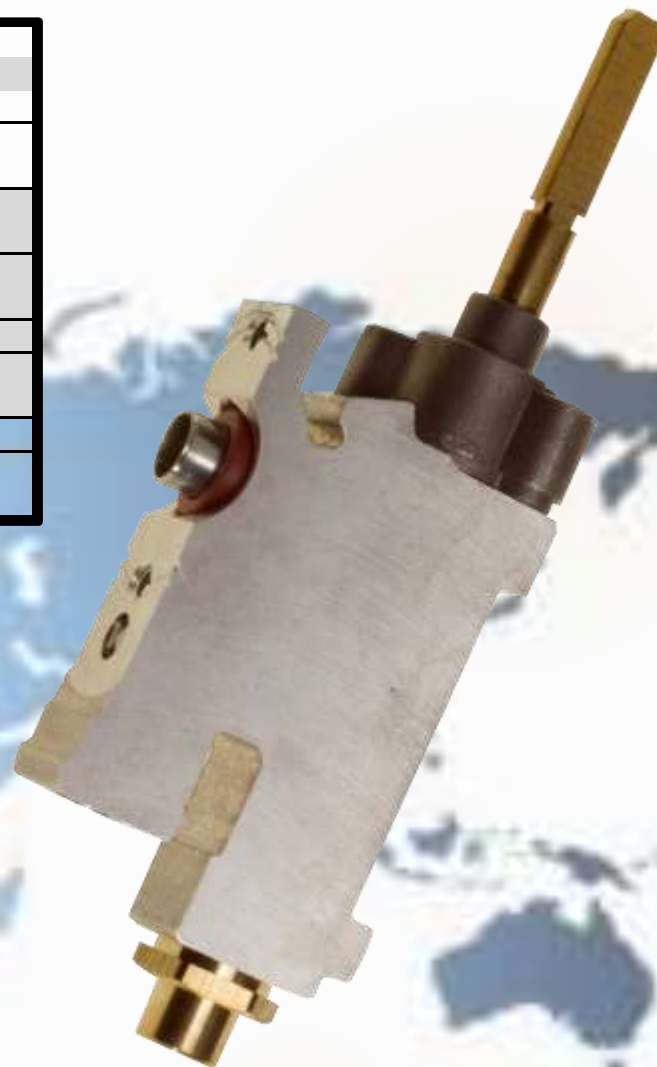





Safety valve for cooker / 565

Knob connector	Diameter	From/to	6 mm	8 mm	(and according to customer spec)		
	Lenght		xx	yy			
	Flat features		According to customer spec				
Gas Inlet	Round		8 mm	10 mm	12 mm	16 mm	21 mm
	Fixation/Distance		According to customer spec				
Gas Outlet	Type	Male					
		Female	M10 100	M12 (2)	M13 100	M14 150	Clip
Opening	Progressivity	Yes	210°	280°			
		No	90°	160°			
Safety system	Connexion		Pin	Faston	M8x1		
Capacity/Power	LPG		300 l/h	15000 BTU		14 kw	
	NG					8 kw	
Ignition Switch		Adaptable on any configuration, all valves are ready to receive it					
Certified		EC	AGA	CSA	Ukrain	Chile	
		And others on special demand					



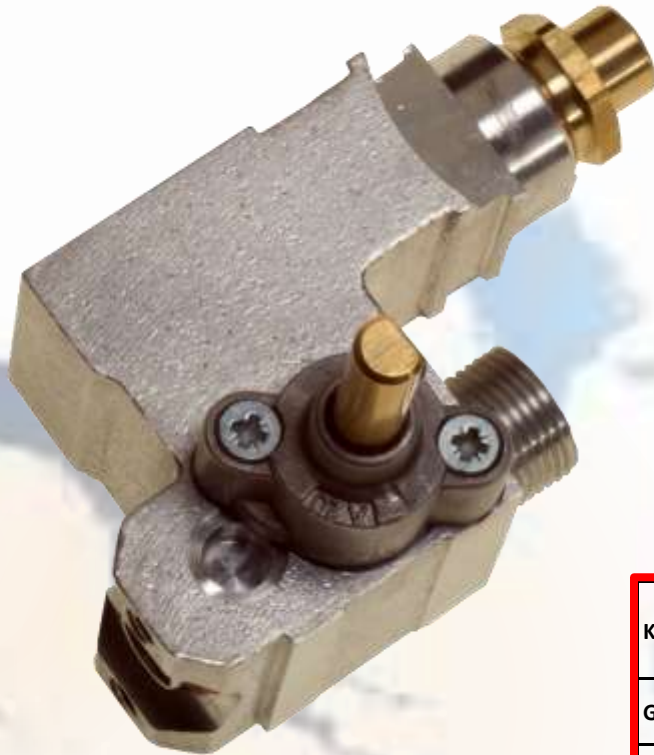

Knob connector	Diameter	From/to	6 mm	8 mm	(and according to customer spec)		
	Lenght		xx	yy			
	Flat features		According to customer spec				
Gas Inlet	Round		8 mm	10 mm	12 mm	16 mm	21 mm
	Fixation/Distance		According to customer spec				
Gas Outlet	Type	Male	M12 100	M12 125	M13 100	M14 150	G1/4
		Female					
Opening	Progressivity	Yes	210°	280°			
		No	90°	160°			
Safety system	Connexion		Pin	Faston	M8x1		
Capacity/Power	LPG		260 l/h	15000 BTU		13 kw	
	NG					7.5 kw	
Ignition Switch			Adaptable on any configuration, all valves are ready to receive it				
Certified			EC	AGA	CSA	Ukrain	Chile
And others on special demand							

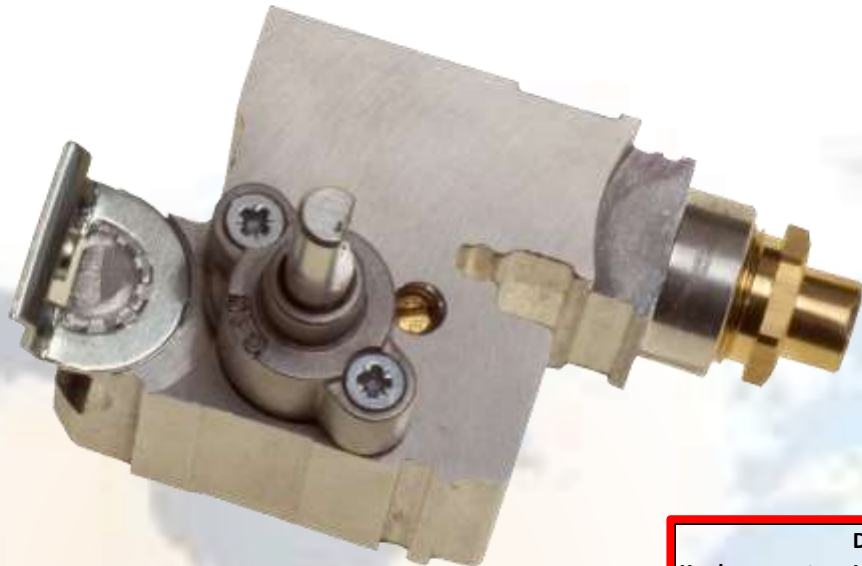


Knob connector	Diameter	From/to	6 mm	8 mm	(and according to customer spec)		
	Lenght		xx	yy			
	Flat features		According to customer spec				
Gas Inlet	Round		8 mm	10 mm	12 mm	16 mm	21 mm
	Fixation/Distance		According to customer spec				
Gas Outlet	Type	Male					
		Female	Clip				
Opening	Progressivity	Yes	210°	280°			
		No	90°	160°			
Safety system	Connexion		Pin	Faston	M8x1		
Capacity/Power	LPG		260 l/h	15000 BTU		13 kw	
	NG					7.5 kw	
Ignition Switch			Adaptable on any configuration, all valves are ready to receive it				
Certified			EC	AGA	CSA	Ukrain	Chile
			And others on special demand				



Knob connector	Diameter Lenght Flat features	From/to	6 mm xx	8 mm yy	(and according to customer spec)		
Gas Inlet	Round Fixation/Distance		8 mm	10 mm	12 mm	16 mm	21 mm
Gas Outlet	Type	Male Female	M12 (2)	M13 100	M14 150	G1/4	Clip
Opening	Progressivity	Yes No	210° 90°	280° 160°			
Safety system	Connexion		Pin	Faston	M8x1		
Capacity/Power	LPG NG		260 l/h	15000 BTU		13 kw 7.5 kw	
Ignition Switch			Adaptable on any configuration, all valves are ready to receive it				
Certified			EC	AGA	CSA	Ukrain	Chile
And others on special demand							


(Valve shown with an orifice directly mounted on the outlet)

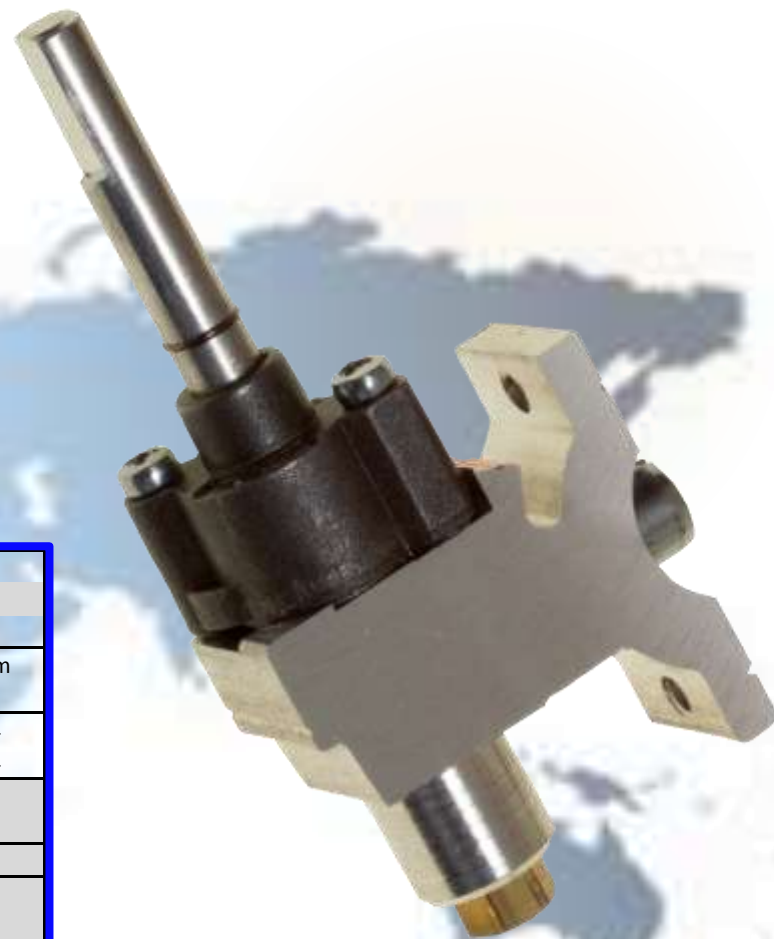

Knob connector	Diameter		6 mm	8 mm	(and according to customer spec)		
	Lenght	From/to	xx	yy			
	Flat features		According to customer spec				
Gas Inlet	Round		8 mm	10 mm	12 mm	16 mm	21 mm
	Fixation/Distance		According to customer spec				
Gas Outlet	Type	Male	1/2 24UNS	M12 (2)	M13 100	M14 150	G1/4
		Female	1/2 24 UNS	M10 100	M12 (2)	M13 / M14	G1/4
Opening	Progressivity	Yes	210°	270°			
		No	90°	160°			
Safety system	Connexion		Pin	Faston	M8x1		
Capacity/Power	LPG		340 l/h	10000 BTU		14 kw	
	NG					8 kw	
Ignition Switch			Adaptable on any configuration, all valves are ready to receive it				
Certified			EC	AGA	CSA	Ukrain	Chile
			And others on special demand				



Knob connector	Diameter		6 mm	8 mm	(and according to customer spec)		
	Lenght	From/to	xx	yy			
	Flat features		According to customer spec				
Gas Inlet	Round		8 mm	10 mm	12 mm	16 mm	21 mm
	Fixation/Distance		According to customer spec				
Gas Outlet	Type	Male					
		Female	1/8	M7 100	M10 100		
Opening	Progressivity	Yes	210°	270°			
		No	90°	160°			
Safety system	Connexion		Pin	Faston	M8x1		
Capacity/Power	LPG		340 l/h	10000 BTU		14 kw	
	NG					8 kw	
Ignition Switch			Adaptable on any configuration, all valves are ready to receive it				
Certified			EC	AGA	CSA	Ukrain	Chile
			And others on special demand				

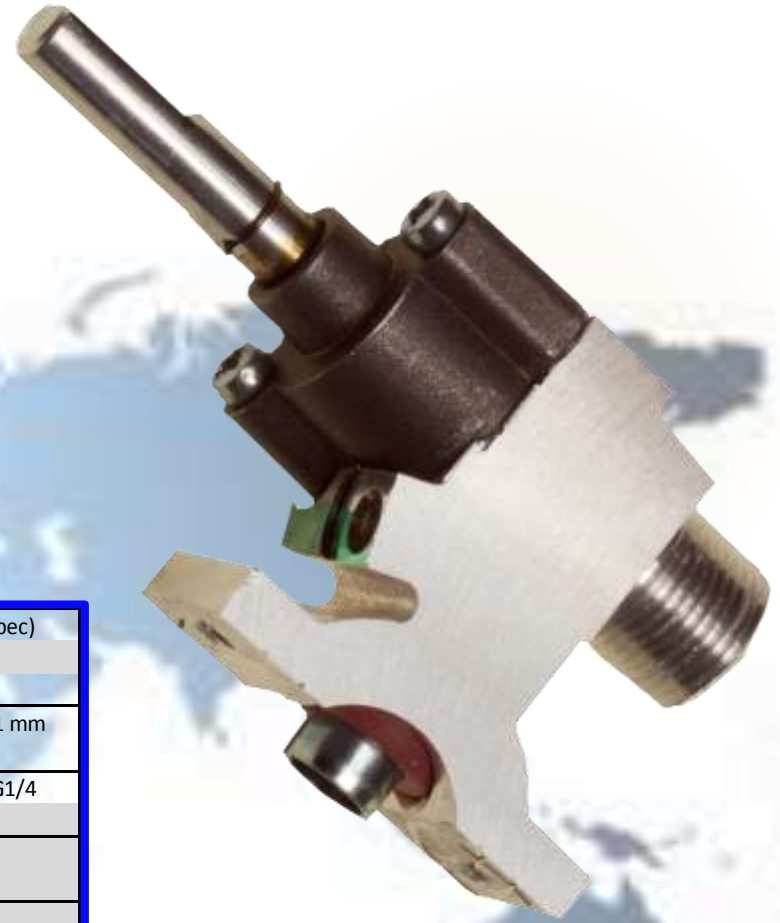

Knob connector	Diameter	From/to	6 mm	8 mm	(and according to customer spec)		
	Lenght		xx	yy			
	Flat features		According to customer spec				
Gas Inlet	Round		8 mm	10 mm	12 mm	16 mm	21 mm
	Fixation/Distance		According to customer spec				
Gas Outlet	Type	Male	1/2 24 UNS	M12 (2)	M13 100	M14 150	G1/4
		Female					
Opening	Progressivity	Yes	210°	270°			
		No	90°	160°			
Safety system	Connexion		Pin	Faston	M8x1		
Capacity/Power	LPG		340 l/h	14000 BTU		14 kw	
	NG					8 kw	
Ignition Switch			Adaptable on any configuration, all valves are ready to receive it				
Certified			EC	AGA	CSA	Ukrain	Chile
			And others on special demand				



Knob connector	Diameter	From/to	6 mm	8 mm	(and according to customer spec)		
	Lenght		xx	yy			
	Flat features		According to customer spec				
Gas Inlet	Round		8 mm	10 mm	12 mm	16 mm	21 mm
	Fixation/Distance		According to customer spec				
Gas Outlet	Type	Male	M13 100	M14 150	G1/4	G1/4	Clip
		Female					
Opening	Progressivity	Yes	210°	270°			
		No	90°	160°			
Safety system	Connexion		Pin	Faston	M8x1		
Capacity/Power	LPG		280 l/h	10000 BTU		14 kw	
	NG					8 kw	
Ignition Switch			Adaptable on any configuration, all valves are ready to receive it				
Certified			EC	AGA	CSA	Ukrain	Chile
And others on special demand							



Knob connector	Diameter	From/to	6 mm	8 mm	(and according to customer spec)		
	Lenght		xx	yy			
	Flat features		According to customer spec				
Gas Inlet	Round		8 mm	10 mm	12 mm	16 mm	21 mm
	Fixation/Distance		According to customer spec				
Gas Outlet	Type	Male	M12 100	M12 125	M13 100	G1/4	Clip
		Female					
Opening	Progressivity	Yes	210°	270°			
		No	90°	160°			
Safety system	Connexion		Pin	Faston	M8x1		
Capacity/Power	LPG		280 l/h	10000 BTU		14 kw	
	NG					8 kw	
Ignition Switch			Adaptable on any configuration, all valves are ready to receive it				
Certified			EC	AGA	CSA	Ukrain	Chile
			And others on special demand				



Knob connector	Diameter	From/to	6 mm	8 mm	(and according to customer spec)		
	Lenght		xx	yy			
	Flat features		According to customer spec				
Gas Inlet	Round		8 mm	10 mm	12 mm	16 mm	21 mm
	Fixation/Distance		According to customer spec				
Gas Outlet	Type	Male	M12 100	M12 125	M13 100	G1/4	Clip
		Female					
Opening	Progressivity	Yes	210°	270°			
		No	90°	160°			
Safety system	Connexion		Pin	Faston	M8x1		
Capacity/Power	LPG		280 l/h	10000 BTU		14 kw	
	NG					8 kw	
Ignition Switch			Adaptable on any configuration, all valves are ready to receive it				
Certified			EC	AGA	CSA	Ukrain	Chile
			And others on special demand				

Sourdillon SAS

8 allée de la robinetterie
37250 Veigne
France

Phone: 00 33 2 47 34 32 00

Contacts

- Sales manager
Max Hornbach / mhornbach@sourdillon.eu
00 33 6 87 39 56 71
- Customer support
Evgheni Potlog / epotlog@sourdillon.eu
00 33 2 47 34 32 28